POINTLUX

ADJUSTABLE LUMINAIRE

FOR GYPSUM BOARD CEILINGS

POINTLUX is a fully adjustable semi-recessed series of stemmed luminaires. The fixture series utilizes MR16 halogen lamps. POINTLUX fixtures can be used as accent lights or to highlight objects. Fixture design allows for interchangeability of any fixture profile in the POINTLUX family into the same housing. Closed ceiling cover plate can be used in place of a fixture.

Enclosed MRLUX profile has a machined ring and enclosed back cap design. All MR16 profiles are offered with either wallwash or object front end snoots. Object front end snoots have a step to accommodate additional accessories. For the Basic MRLUX the Ushio Reflekto MR16 lamp is recommended to reduce back spill.

FEATURES:

- 45° lockable tilt adjustment from vertical
- Stem has 360° rotation
- Several profile and application options
- Lamping options: 50W Max MR16
- Various lensing and accessory options
- Ceiling cover plate has no visible fasteners
- Flangeless gypsum ceiling installation, ceiling cover plate sits flush with ceiling plane
- Non-IC thermally protected luminaire

The POINTLUX series is NRTL (Nationally Recognized Testing Laboratory) certified for purposes of OSHA safety standards product-approval requirements.

PLAN VIEW

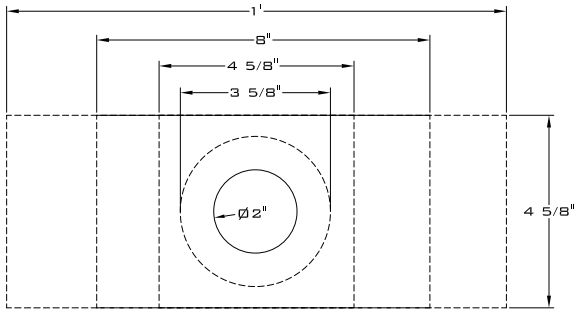

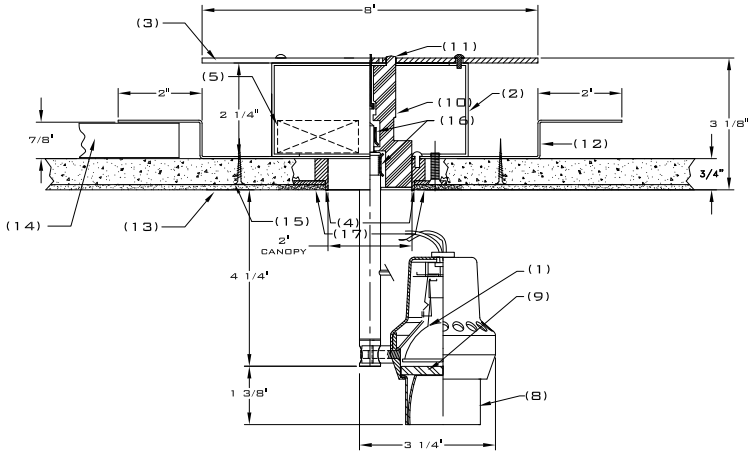

NOTES:

1. Lamp 12V MR16 50W max (by others)
2. Box 18GA (min) steel zinc coated
3. Cover and heat sink 1/8" aluminum
4. Cylindrical aluminum throat, plaster bead and screed
5. Transformer 60W lightech LET60 class 2
6. 1.2" diameter machined aluminum
7. Center covered brass
8. Object front end
9. Lens
10. Thermoplastic body casting anti rotation boss
11. Box bottom and MTG BRKT 20 GA steel
12. Drill-point screws
13. Gypsum board ceiling with skim coat
14. Chicago Bar (hat channel)
15. Drill-point screws
16. .035" thick berryllium copper contacts

PROFILE and APPLICATION OPTIONS:

BASIC MRLUX



Object Light



Wallwasher

ENCLOSED MRLUX



Object Light



Wallwasher

ORDERING MATRIX: **PNTLX-G-** _ _ - _ _ _ _ _

Profile / Application		Voltage		Exterior Finish		Enclosed Cone Interior Finish**		Lens		Lens Coating		Additional Accessories	
EO	Enclosed Object front	**120**	120/12V	**WH**	White	**C**	Clear (EO only)	**CL**	Clear	**NC**	No Coating	**N**	None
EW	Enclosed Wallwash front			**BL**	Black	**P**	Pewter(EO only)	**SO**	Solite	**DC**	Nulux Diffusion Coating	**HC**	Hex Cell Louver
BO	Basic Object front			**SL**	Silver	**G**	Gold (EO only)	**SD**	Stippled (MR16 only)	**UV**	UV Coating	**LR5**	50% Light Reduction Screen
BW	Basic Wallwash front			**CE**	Custom	**B**	Black	**LS5**	Linear Spread 55°			**CUV**	Clear UV Lens
						W	White	**LS7**	Linear Spread 75°			**CCP**	Closed Ceiling Cover Plate
						CC	Custom	**WW**	Wallwash 55/75°*			**O**	Other

*Wallwash lens with light diffusion coating standard with Wallwash front end
**Clear Alzak standard with object front end
Contact NULUX directly to specify custom products

6/1/2015

1717 TROUTMAN STREET RIDGEWOOD, NY 11385 • P: 718.383.1112 • F: 718.383.1118 • www.NULUX.com

NULUX