

SPOTLUX 4

SQUARE PYRAMID

FOR GYPSUM BOARD CEILINGS


SPOTLUX 4 is a 4" by 4" square aperture incandescent MR16 adjustable downlight or wallwash fixture designed to provide an elegant form of recessed illumination. Square pyramid trim is available in various finishes, and provides low source brightness in combination with the internal lampholder snoot and clear solite lens. It is designed for flangeless installation in gypsum board ceilings. Rapid relamping is made possible by flipping the lamp carriage down below the ceiling. Fixed downlight versions are also available.

FEATURES:


- Aluminum 4"x4" square pyramidal trim with Solite lens
- Adjustable accent or downlight capabilities
- Spotlux mechanism allows lockable tilt angles up to 45° from vertical and full lockable rotation.
- Perforated metal screed for trimless installation
- Wattage Options: Max 50W-8"x8" Housing or Max 65W-10"x10" Housing. Please specify in matrix.
- Full lockable 360° rotation
- Individual lensing options at lamp
- Additional accessories are available
- Non-IC Thermally protected luminaire
- Suitable for damp location with open trim assembly
- Suitable for wet location only with covered ceiling mount and lens trim assembly

SPOTLUX 4 is NRTL (Nationally Recognized Testing Laboratory) certified for purposes of OSHA safety standards product-approval requirements.

REFLECTED PLAN VIEWS: 65W Max 10"x10" Housing

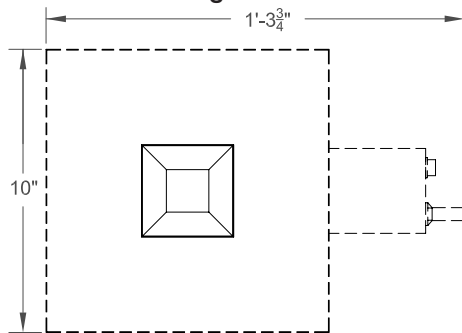


50W Max 8"x8" Housing

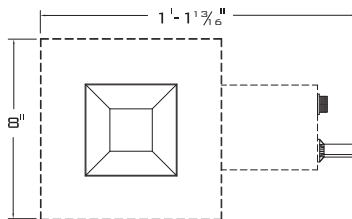

NOTES:

1. 20 GA steel housing
2. 12V MR16 lamp 50W max (by others)
3. Lamp lens
4. Electronic transformer
5. Thermal protector
6. Transformer box
7. Trim lens
8. Adjustable mounting bar
9. 4" pyramidal trim
10. 5/8" gypsum board ceiling
11. Lamp holder assembly
12. Object front end

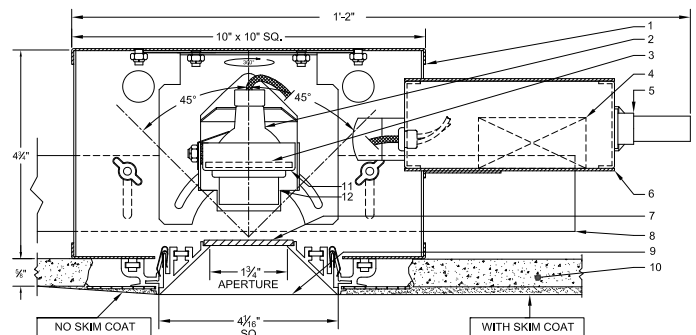

ORDERING MATRIX: SPT4-SP-G- _____

Application	Max Wattage	Voltage	Transformer	Interior Finish	Trim Finish	Lamp Lens	Trim Lens	Additional Accessories
A Adj Angle	65W 65W-10x10	120 120/12V	E Electronic	B Black	W White	C Clear Pyrex	S Solite	N None
D Fixed Downlight	50W 50W-8x8		AE AFCI Electronic M Magnetic	W White	B Black CA Clear Anodized C Custom	N None S Solite D Stippled LS Linear Spread W Wallwash 55/75	N None C Clear Pyrex	HC Hex Cell Louver CUV Clear UV Lens O Other UVC UV Lens Coating WL Wet Location Lens

Contact NULUX directly to specify custom products

4/9/14